

型号 Model: TRF-130CH


电压 Voltage: 1.5-24V

转速 Speed: 2000-30000rpm

应用领域 Application Fields: 机器人 Robots, 电子门锁 Lockset,  
玩具 Toys, 家电 Appliances,  
办公设备 Office equipments.




外型尺寸/DRAWING(mm)

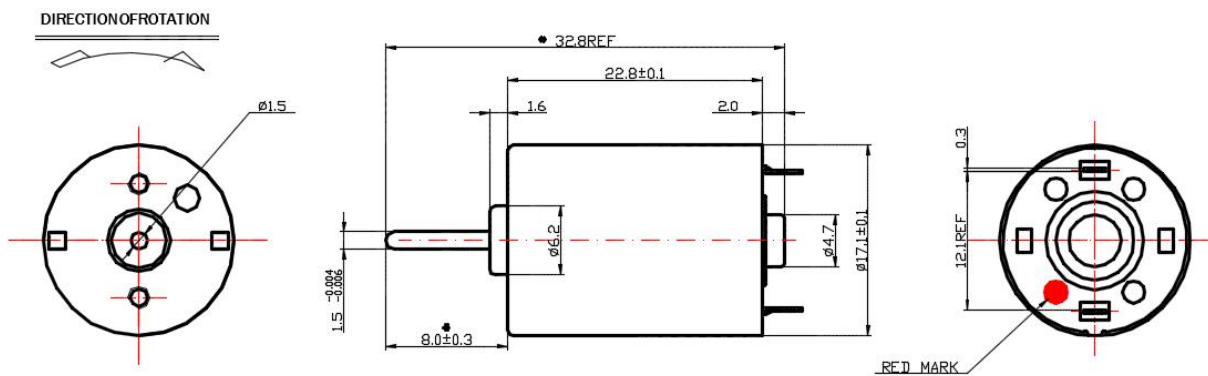

电机参数/Motor Data:

型号 Model	始动电压 Start voltage	额定电压 Rated voltage	空载转速 No Load Speed	空载电流 No Load current	负载 Load	负载转速 Load Speed	负载电流 load current	堵转力矩 Stall torque	功率 Power
	V	V	rpm	A	g.cm	rpm	A	g.cm	W
TRF-130CH-18115	0.8	3.0	8150	0.075	5.0	6980	0.23	34	0.73
TRF-130CH-13200	1.5	9.0	13500	0.1	10.0	11500	0.35	55	2.4

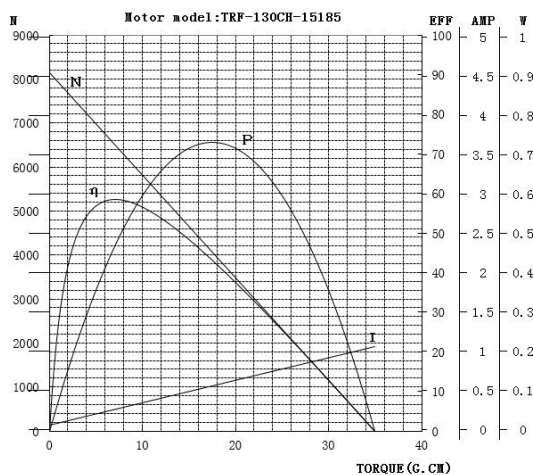

备注 Remarks

- 电机测试环境温度 常温 25-30°C  
Ambient temperature 25-30°C
- 外型图中带\*尺寸可按客户要求调整。  
Dimension with \* in the drawing can be adjusted according to customer's requirement.
- 可按客户要求进行性能,安装,电源连接方式,外型尺寸的设计。  
Motor can be designed upon customer's requirements on performance, installation, power connection method and motor dimension.

1inch=25.4mm  
1g.cm=0.098mN.m

1mm=0.0394inch  
1mN.m=10.2g.cm

型号 Model: TRF-130CHZ

电压 Voltage: 1.5-24V


转速 Speed: 2000-15000rpm

应用领域 Application Fields::

美容产品 Beauty Products, 成人用品 Sex toys,  
按摩保健 Massage Equip, 电动牙刷 Electric toothbrush




外型尺寸/DRAWING(mm)

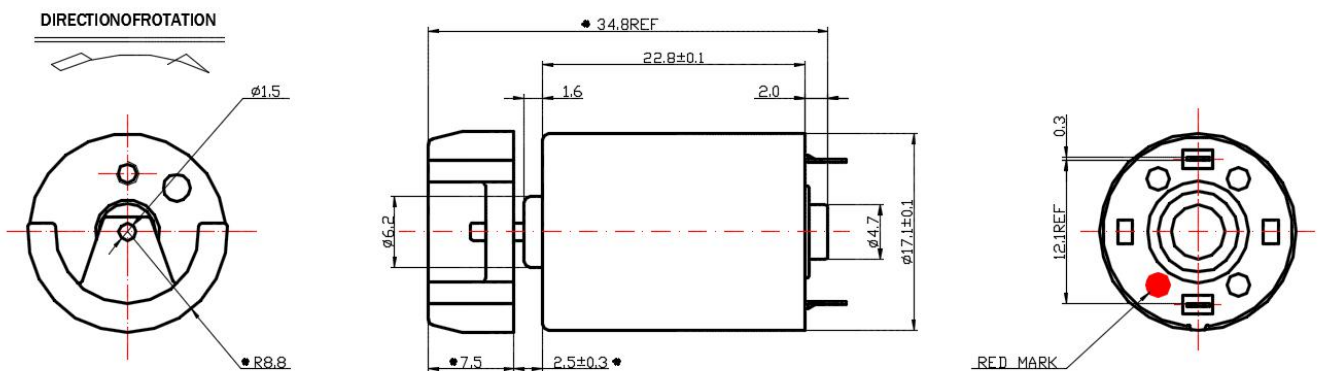

电机参数/MOTOR Data:

型号 Model	始动电压 Start voltage	额定电压 Rated voltage	负载 Load	电流 current	转速 Speed	堵转电流 Lock rotor	功率 Power
	V	V	size	A	rpm	A	W
TFF-130CHZ-18110	1.5	3.7	R8.8*7.5	0.48	7800	1.8	1.1
TFF-130CHZ-15180	1.2	3.7	R8.0*7.2	0.25	5200	0.92	0.52

可配置铁,铜,钨等材质及各种形状尺寸的偏心轮  
Motor can be mounted with various shape and sizes of eccentric weight which is made of iron,brass or ferro-alloy to become vibration motor.

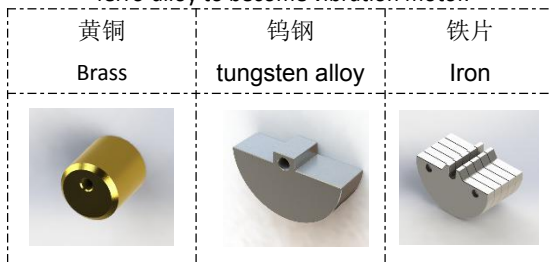

备注 Remarks

- 电机测试环境温度 常温 25-30°C  
Ambient temperature 25-30°C
- 外型图中带\*尺寸可按客户要求调整。  
Dimension with \* in the drawing can be adjusted according to customer's requirement.
- 可按客户要求进行性能,安装,电源连接方式,外型尺寸的设计。  
Motor can be designed upon customer's requirements on performance, installation, power connection method and motor dimension.

1inch=25.4mm  
1g.cm=0.098mN.m

1mm=0.0394inch  
1mN.m=10.2g.cm